

## 600 Metric Series

**Inner Dimension** = Boundary dimensions (mm)


**Outer Dimension** = Boundary dimensions (mm)

**Width OPEN** = Boundary dimensions (mm)

**Width ZZ/2RS** = Boundary dimensions (mm)

**Dynamic(Cr)** = Basic load ratings (Lbf)

**Static(Cor)** = Basic load ratings (Lbf)

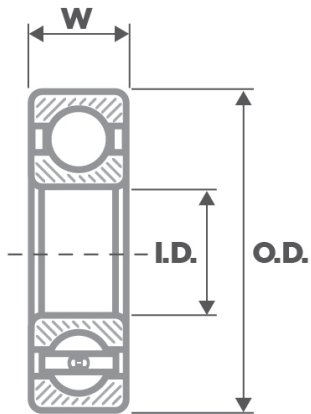

Size	Inner Dimension	Outer Dimension	Width OPEN	Width ZZ/2RS	Dynamic(Cr)	Static(Cor)	Weight(lb)
603	3	9	3	5	128.15	35.97	0.00198
604	4	12	4	4	218.06	80.93	0.00462
605	5	14	5	5	292.25	110.16	0.0077
606	6	17	6	6	508.07	166.36	0.01276
607	7	19	6	6	526.05	200.08	0.01672
608	8	22	7	7	7410.87	303.49	0.0264
609	9	24	7	7	764.35	325.97	0.0352
623	3	10	4	4	143.88	49.46	0.0044
624	4	13	5	5	294.50	110.16	0.0066
625	5	16	5	5	395.66	152.87	0.0088
626	6	19	6	6	526.05	198.96	0.0176
627	7	22	7	7	753.11	314.73	0.0308
628	8	24	8	8	899.23	357.44	0.0352
629	9	26	8	8	1022.88	438.38	0.0418
633	3	13	5	5	292.55	110.16	0.0066
634	4	16	5	5	395.66	152.87	0.011
635	5	19	6	6	526.05	198.96	0.0176
636	6	22	7	7	741.87	303.49	0.0286

Size	Inner Dimension	Outer Dimension	Width OPEN	Width ZZ/2RS	Dynamic(Cr)	Static(Cor)	Weight(lb)
637	7	26	9	9	910.47	364.19	0.0528
638	8	28	9	9	1022.88	438.38	0.0638
639	9	30	10	10	1146.52	537.29	0.077
673	3	6	2	2.5	54.40	21.13	0.00044
674	4	7	2	2.5	60.47	38.22	0.000616
675	5	8	2	2.5	65.64	31.92	0.000704
676	6	10	2.5	3	119.15	53.95	0.00143
677	7	11	2.5	3	124.77	60.47	0.001474
678	8	12	2.5	3.5	129.26	66.99	0.00165
683	3	7	2	3	81.52	26.44	0.000726
684	4	9	2.5	4	136.59	48.47	0.001386
685	5	11	3	5	138.80	57.28	0.00242
686	6	13	3.5	5	231.33	88.12	0.00418
687	7	14	3.5	5	251.16	114.65	0.00462
688	8	16	4	5	283.26	132.64	0.00682
689	9	17	4	5	298.99	149.50	0.00704
693	3	8	3	4	125.89	42.71	0.001342
694	4	11	4	4	215.82	76.43	0.00374
695	5	13	4	4	296.75	110.16	0.00528
696	6	15	5	5	393.41	150.62	0.00858
697	7	17	5	5	359.69	159.61	0.01166
698	8	19	6	6	386.67	188.84	0.01584
699	9	20	6	6	550.78	236.05	0.0187