

600 Metric Series (Flanged)

Inner Dimension = Boundary dimensions (mm)


Outer Dimension = Boundary dimensions (mm)

Width OPEN = Boundary dimensions (mm)

Width ZZ/2RS = Boundary dimensions (mm)

Dynamic(Cr) = Basic load ratings (Lbf)

Static(Cor) = Basic load ratings (Lbf)

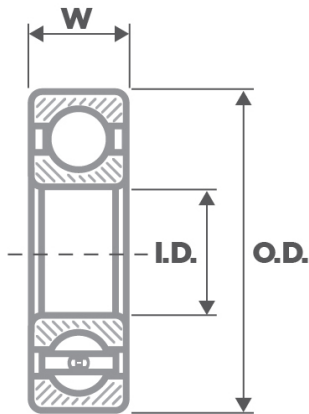

Size	Inner Dimension	Outer Dimension	Width OPEN	Width ZZ/2RS	Dynamic(Cr)	Static(Cor)	Weight(lb)
F603	3	9	3	5	42.71	49.46	0.0022
F604	4	12	4	4	220.31	83.18	0.0055
F605	5	14	5	5	229.30	110.16	0.00858
F606	6	17	6	6	519.31	193.33	0.0143
F607	7	19	6	6	629.46	229.30	0.01914
F608	8	22	7	7	696.90	269.77	0.02948
F623	3	10	4	4	146.13	51.71	0.00407
F624	4	13	5	5	301.24	112.40	0.00748
F625	5	16	5	5	301.24	150.62	0.01188
F626	6	19	6	6	645.20	245.04	0.0198
F627	7	22	7	7	674.42	247.29	0.03124
F634	4	16	5	5	397.91	155.12	0.01254
F635	5	19	6	6	409.15	206.82	0.0209
F683	3	7	2	3	53.95	22.48	0.000814
F684	4	9	2.5	4	11.16	49.46	0.00154
F685	5	11	3	5	164.11	60.70	0.00286
F686	6	13	3.5	5	247.29	101.16	0.00506
F687	7	14	3.5	5	269.77	119.15	0.0055

Size	Inner Dimension	Outer Dimension	Width OPEN	Width ZZ/2RS	Dynamic(Cr)	Static(C or)	Weight(l b)
F688	8	16	4	5	269.77	134.88	0.00814
F689	9	17	4	5	368.69	164.11	0.00858
F693	3	8	3	4	101.16	47.21	0.00154
F694	4	11	4	4	164.11	65.19	0.00418
F695	5	13	4	4	26.78	96.67	0.00616
F696	6	15	5	5	397.91	155.12	0.00946
F697	7	17	5	5	368.69	164.11	0.01232
F698	8	19	6	6	512.56	209.07	0.01826
F699	9	20	6	6	393.41	179.85	0.0209
