

R Inch Series

Inner Dimension = Boundary dimensions (mm)


Outer Dimension = Boundary dimensions (mm)

Width OPEN = Boundary dimensions (mm)

Width ZZ/2RS = Boundary dimensions (mm)

Dynamic(Cr) = Basic load ratings (Lbf)

Static(Cor) = Basic load ratings (Lbf)

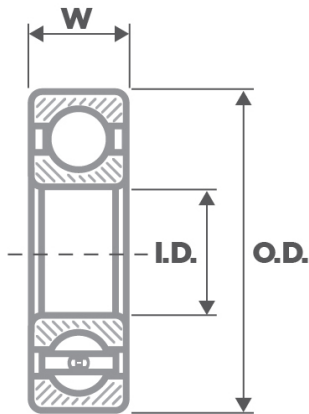

Size	Inner Dimension	Outer Dimension	Width OPEN	Width ZZ/2RS	Dynamic(Cr)	Static(Cor)	Weight(lb)
R1-5	0.0937	.03125	0.1094	0.1406	124	39	0.00132
R10	0.6250	1.3750	0.2812	0.3438	966	569	0.0616
R12	0.7500	1.6250	0.3125	0.4375	1369	864	0.0946
R133	0.0937	0.1875	0.0625	0.0937	42	13	0.00022
R14	0.8750	1.8750	.03750	0.5000	1623	1020	0.1562
R144	0.1250	0.2500	0.0937	0.1094	64	21	0.00055
R155	0.1562	0.3125	0.1094	0.1250	81	33	0.001122
R156	0.1875	0.3125	0.1094	0.1250	81	33	0.000858
R16	1.0000	2.0000	0.3750	0.5000	1736	1164	0.187
R166	0.1875	0.3750	0.1250	0.1250	160	61	0.001782
R168	0.2500	0.3750	0.1250	0.1250	84	39	0.001254
R18	1.1250	2.1250	0.3750	0.5000	1852	1164	0.187
R1810	0.3125	0.5000	0.1562	0.1562	121	62	0.003432
R188	0.2500	.05000	0.1250	0.1875	243	99	0.003366
R2	0.1250	.03750	0.1562	0.1562	142	49	0.002992
R2-5	0.1250	0.3125	0.1094	0.1406	126	40	0.00121
R2-6	0.1250	0.3750	0.1094	0.1406	144	51	0.002112
R20	1.2500	2.2500	0.3750	0.5000	1935	1455	0.2068

Size	Inner Dimension	Outer Dimension	Width OPEN	Width ZZ/2RS	Dynamic(Cr)	Static(C or)	Weight(l b)
R22	1.3750	2.5000	0.4375	0.5625	2803	1947	0.2838
R24	1.5000	2.6250	0.4375	0.5625	2803	1947	0.3014
R3	0.1875	0.5000	0.1562	0.1960	292	109	0.004862
R4	0.2500	0.6250	.01960	0.1960	333	138	0.009812
R4A	0.2500	0.7500	0.2188	0.2812	526	199	0.016456
R6	0.3750	0.8750	0.2188	0.2812	753	32	0.019844
R8	0.5000	1.1250	0.2500	0.3125	884	466	0.033
